

AMPLPULS

AMQR150□N Series




▲ Features

- Universal AC input/Full range
- Protections: short circuit/overload/over voltage/over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- 100% full load burn in-test
- 3 years warranty

▲ Applications

- Industrial control system
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus

▲ Model Encoding

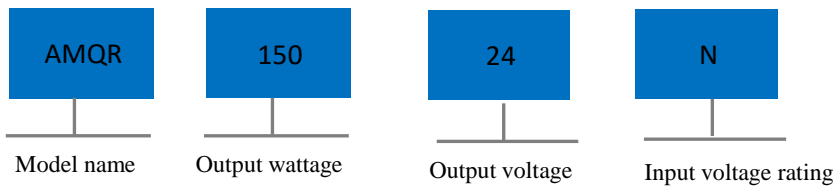


AMPLPULS

Specifications

Input		
Voltage range Note.1	96-264VAC 120-370VDC	
AC current	2.6A/115VAC 1.7A/230VAC	
Frequency range	47-63Hz	
Inrush current (max)	20A/115VAC 35A/230VAC	
Output		
DC voltage (V)	24V	
Efficiency	87%	
Rated Current(A)	6.5A/230VAC 5.2A/115VAC	
Rated power(W)	156W/230VAC 125W/115VAC	
Voltage ADJ. range	±10%	
Ripple & noise(max) Note.2	150mVp-p	
Voltage tolerange Note.4	±1%	
Line regulation	±0.5%	
Load regulation	±1%	
Setup, rise time	1500ms 60ms/230VAC 3000ms 60ms/115VAC(at full load)	
Hold up time	16ms/230VAC 10ms/115VAC(at full load)	
Status indicator	Green LED	
Protection		
Overload Note.8	105%-130% rated output power	
	Protection type: Constant current limiting, recovers automatically after fault condition is removed/230VAC	
	105%-150% rated output power	
	Protection type: Constant current limiting, recovers automatically after fault condition is removed/115VAC	
Over voltage(V)	29-33V	
	Protection type:Shut down O/P voltage ,re-power on to recover	
Over temperature	Shut down O/P voltage ,re-power on to recover	
Safety and EMC		
Withstand voltage	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC	
Isolation resistance	I/P-O/P,I/P-FG,O/P-FG :100M Ohms/500VDC/25℃/70% RH	
Safety standards	60950-1、GB4943.1	
EMC emission	Compliance to EN55032(CISPR32) Class A,EN61000-3-2,Class A(≤80% LOAD)EN61000-3-3	
EMC immunity	Compliance to EN61000-4-2,3,4,5,6,8,11,EN55024,EN61000-6-2(EN50082-2),EN61204-3 heavy industry level, criteria A	
Environmental		
Working temperature	- 20~+60 ℃ (Refer to "Derating curve ")	
Storage temperature	- 40~+85℃	
Storage humidity	10-95% RH	
Vibration	Component:10-500Hz,2G 10 min/1cycle,60 min each along X,Y,Z axes	
Others		
Mean time between failure	472.5K hrs min MIL-HDBK-217F(25℃)	
Installation	Install on DIN rail TS35	
Protection class	IP20	
Weight	0.65kg	
Length*width*height	125.2*40*113.5	
Data	Details	Model name
	AMQR 156W 6.5A/24V	AMQR15024N


AMPLPULS

Installation Instruction

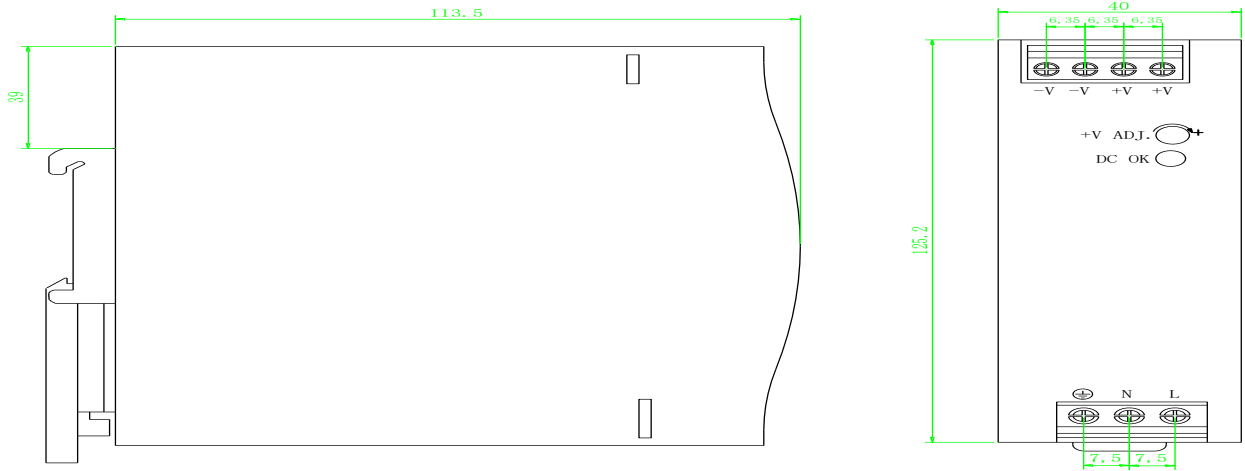

Tightening Torque Max. :10.35 kgF-cm (9 Lb-in)

Derating curve

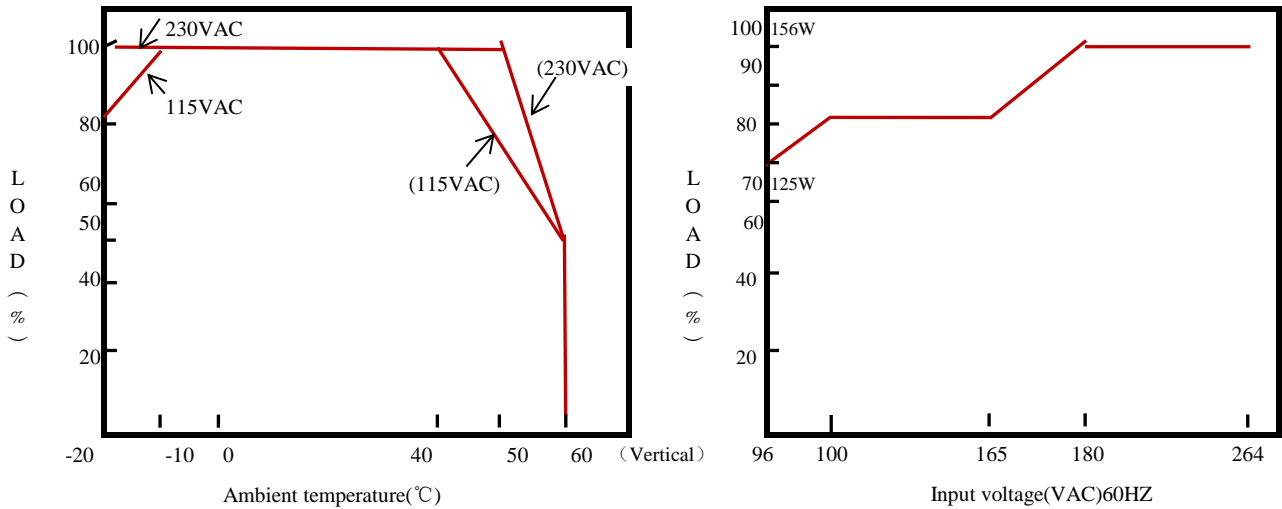

Note:

1. Derating may be needed under low input voltage. Please check the derating curve for more details.
2. Ripple & noise are measured at 20MHZ of bandwidth by using a "12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
3. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 °C of ambient temperature.
4. Tolerance: includes set up tolerance, line regulation and load regulation.
5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives
7. Installation clearances: 40mm on the top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power, In case the adjacent device is a heat source, 15mm clearance is recommended.
8. Hiccup mode at 90-100VAC, recovers automatically after fault condition is removed.